


DIN 125 B ähnlich ISO 7089/7090

Scheiben

Form B : mit Außenfase

Stahl 140 HV | verzinkt | Cr(VI) - frei

Hinweis: DIN-Norm wurde zurückgezogen

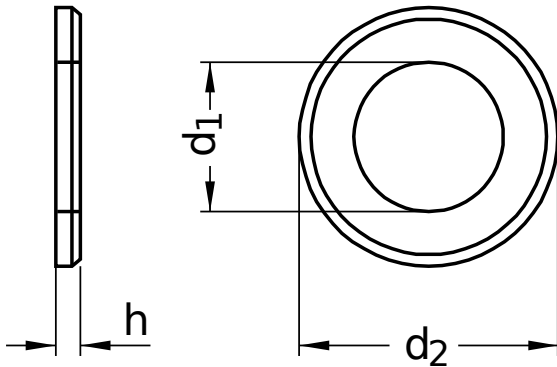

Durchmesser (d)	d ₁		d ₂		Nennmaß	h	
	min.	max.	min.	max.		min.	max.
3,2	3,2	3,38	6,64	7	0,5	0,45	0,55
4,3	4,3	4,48	8,64	9	0,8	0,70	0,90
5,3	5,3	5,48	9,64	10	1,0	0,90	1,10
6,4	6,4	6,62	11,57	12	1,6	1,40	1,80
8,4	8,4	8,62	15,57	16	1,6	1,40	1,80
10,5	10,5	10,77	19,48	20	2,0	1,80	2,20
13	13,0	13,27	23,48	24	2,5	2,30	2,70
15	15,0	15,27	27,48	28	2,5	2,30	2,70
17	17,0	17,27	29,48	30	3,0	2,70	3,30
19	19,0	19,33	33,38	34	3,0	2,70	3,30
21	21,0	21,33	36,38	37	3,0	2,70	3,30
23	23,0	23,33	38,38	39	3,0	2,70	3,30
25	25,0	25,33	43,38	44	4,0	3,70	4,30
27	27,0	27,33	49,38	50	4,0	3,70	4,30
28	28,0	28,33	49,38	50	4,0	3,70	4,30
31	31,0	31,39	55,26	56	4,0	3,70	4,30
34	34,0	34,62	58,80	60	5,0	4,40	5,60
37	37,0	37,62	64,80	66	5,0	4,40	5,60
40	40,0	40,62	70,80	72	6,0	5,40	6,60
43	43,0	43,62	76,80	78	7,0	6,00	8,00
46	46,0	46,62	83,60	85	7,0	6,00	8,00
50	50,0	50,62	90,60	92	8,0	7,00	9,00
52	52,0	52,74	90,60	92	8,0	7,00	9,00
58	58,0	58,74	103,60	105	9,0	8,00	10,00
60	60,0	60,74	108,60	110	9,0	8,00	10,00
62	62,0	62,74	108,60	110	9,0	8,00	10,00
66	66,0	66,74	113,60	115	9,0	8,00	10,00
70	70,0	70,74	118,60	120	10,0	9,00	11,00
74	74,0	74,74	123,40	125	10,0	9,00	11,00
78	78,0	78,74	133,40	135	10,0	9,00	11,00
82	82,0	82,87	138,40	140	12,0	10,80	13,20

Alle technischen Daten beziehen sich auf das Maß mm

