


DIN 439 similar to ISO 4035

Hexagon nuts

Low version | Form B: with chamfer

Stainless steel A2 | Cr(VI)-free | Metric fine thread

Further information: DIN-standard has been withdrawn | different spanner widths for M10, M12, M14 and M22 | only the regular thread is included in ISO 4035 | the fine thread was transferred to ISO 8675

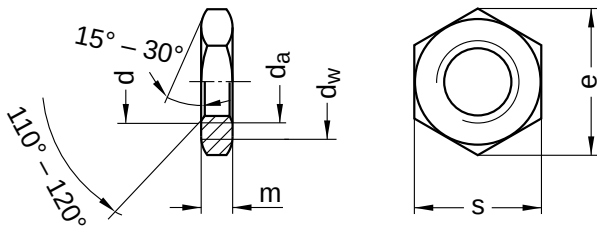

Diameter (d)	d _a		d _w	e	m		s		Pitch (P)	Tool size
	min.	max.			min.	max.	min.	max.		
M8 x 0.75	8	8.75	11.6	14.38	3.70	4.0	12.73	13	0.75	SW 13
M8 x 1	8	8.75	11.6	14.38	3.70	4.0	12.73	13	1.00	SW 13
M10 x 1	10	10.80	15.6	18.90	4.70	5.0	16.73	17	1.00	SW 17
M10 x 1.25	10	10.80	15.6	18.90	4.70	5.0	16.73	17	1.25	SW 17
M12 x 1	12	13.00	17.4	21.10	5.70	6.0	18.67	19	1.00	SW 19
M12 x 1.25	12	13.00	17.4	21.10	5.70	6.0	18.67	19	1.25	SW 19
M12 x 1.5	12	13.00	17.4	21.10	5.70	6.0	18.67	19	1.50	SW 19
M14 x 1.5	14	15.10	20.5	24.49	6.42	7.0	21.67	22	1.50	SW 22
M16 x 1.5	16	17.30	22.5	26.75	7.42	8.0	23.67	24	1.50	SW 24
M18 x 1.5	18	19.50	24.9	29.56	8.42	9.0	26.16	27	1.50	SW 27
M20 x 1.5	20	21.60	27.7	32.95	9.10	10.0	29.16	30	1.50	SW 30
M20 x 2	20	21.60	27.7	32.95	9.10	10.0	29.16	30	2.00	SW 30
M22 x 1.5	22	23.80	29.5	35.03	9.90	11.0	31.00	32	1.50	SW 32
M22 x 2	22	23.80	29.5	35.03	9.90	11.0	31.00	32	2.00	SW 32
M24 x 1.5	24	25.90	33.2	39.55	10.90	12.0	35.00	36	1.50	SW 36
M24 x 2	24	25.90	33.2	39.55	10.90	12.0	35.00	36	2.00	SW 36
M27 x 1.5	27	29.20	38.0	45.20	12.40	13.5	40.00	41	1.50	SW 41
M27 x 2	27	29.20	38.0	45.20	12.40	13.5	40.00	41	2.00	SW 41
M30 x 1.5	30	32.40	42.7	50.85	13.90	15.0	45.00	46	1.50	SW 46
M30 x 2	30	32.40	42.7	50.85	13.90	15.0	45.00	46	2.00	SW 46
M33 x 2	33	35.60	46.6	55.37	15.40	16.5	49.00	50	2.00	SW 50
M42	42	45.40	60.0	71.30	19.70	21.0	63.10	65	4.50	SW 65
M45	45	48.60	64.7	76.95	21.20	22.5	68.10	70	4.50	SW 70

All technical data refer to the measure mm

