


DIN 571

Sechskant-Holzschrauben

Außensechskant

Edelstahl A2 | Cr(VI) - frei | Holzgewinde

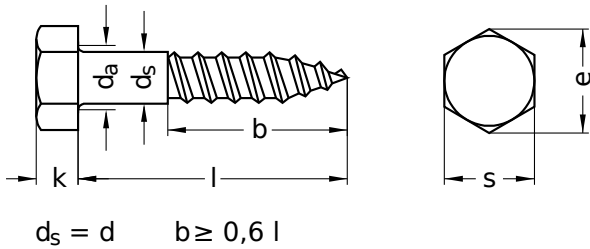

Durchmesser (d)	d _a max.	d _s		Nennmaß	k		e min.	s		Werkzeuggröße
		min.	max.		min.	max.		min.	max.	
4	5,0	3,52	4	2,8	2,50	3,10	7,50	6,64	7	SW 7
5	6,0	4,52	5	3,5	3,13	3,88	8,63	7,64	8	SW 8
6	7,2	5,52	6	4,0	3,63	4,38	10,89	9,64	10	SW 10
7	8,2	6,42	7	5,0	4,63	5,38	13,07	11,57	12	SW 12
8	10,2	7,42	8	5,5	5,13	5,88	14,20	12,57	13	SW 13
10	12,2	9,42	10	7,0	6,55	7,45	18,72	16,57	17	SW 17
12	15,2	11,30	12	8,0	7,55	8,45	20,88	18,48	19	SW 19
16	19,2	15,30	16	10,0	9,55	10,45	26,17	23,16	24	SW 24

Nennmaß	Länge (l)	
	min.	max.
20	18,95	21,05
25	23,95	26,05
30	28,95	31,05
35	33,75	36,25
40	38,75	41,25
45	43,75	46,25
50	48,75	51,25
60	58,50	61,50
70	68,50	71,50
80	78,50	81,50

Nennmaß	Länge (l)	
	min.	max.
90	88,25	91,75
100	98,25	101,75
110	108,25	111,75
120	118,25	121,75
130	128,00	132,00
140	138,00	142,00
150	148,00	152,00
160	158,00	162,00
180	178,00	182,00
200	197,70	202,30

Alle technischen Daten beziehen sich auf das Maß mm



DIN 571

Sechskant-Holzschrauben

Außensechskant

Edelstahl A2 | Cr(VI) - frei | Holzgewinde

Durchmesser (d)	Länge (l)																			
	20	25	30	35	40	45	50	60	70	80	90	100	110	120	130	140	150	160	180	200
4	●	●	●		●															
5		●	●	●	●	●	●													
6		●	●	●	●	●	●	●	●	●										
7					●	●	●	●												
8		●	●	●	●	●	●	●	●	●	●	●		●						
10					●		●	●	●	●	●	●	●	●	●				●	●
12							●	●	●	●	●	●	●	●						
16								●	●	●	●	●	●	●	●	●	●	●		

• Kombinationen im eShop erhältlich | Weitere Größen auf Anfrage

Alle technischen Daten beziehen sich auf das Maß mm

