


**DIN 571**  
**Sechskant-Holzschrauben**

Außensechskant

Edelstahl A4 | Cr(VI) - frei | Holzgewinde

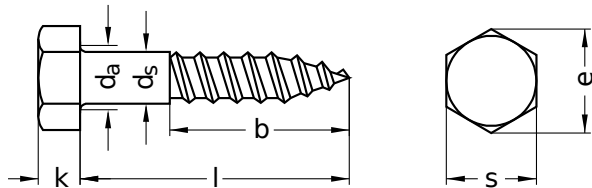

$d_s = d$      $b \geq 0,6 l$

Durchmesser (d)	d <sub>a</sub> max.	d <sub>s</sub>		Nennmaß	k		e min.	s		Werkzeuggröße
		min.	max.		min.	max.		min.	max.	
4	5,0	3,52	4	2,8	2,50	3,10	7,50	6,64	7	SW 7
5	6,0	4,52	5	3,5	3,13	3,88	8,63	7,64	8	SW 8
6	7,2	5,52	6	4,0	3,63	4,38	10,89	9,64	10	SW 10
7	8,2	6,42	7	5,0	4,63	5,38	13,07	11,57	12	SW 12
8	10,2	7,42	8	5,5	5,13	5,88	14,20	12,57	13	SW 13
10	12,2	9,42	10	7,0	6,55	7,45	18,72	16,57	17	SW 17
12	15,2	11,30	12	8,0	7,55	8,45	20,88	18,48	19	SW 19
16	19,2	15,30	16	10,0	9,55	10,45	26,17	23,16	24	SW 24

Nennmaß	Länge (l)	
	min.	max.
20	18,95	21,05
25	23,95	26,05
30	28,95	31,05
35	33,75	36,25
40	38,75	41,25
45	43,75	46,25
50	48,75	51,25
60	58,50	61,50
70	68,50	71,50
80	78,50	81,50

Nennmaß	Länge (l)	
	min.	max.
90	88,25	91,75
100	98,25	101,75
110	108,25	111,75
120	118,25	121,75
130	128,00	132,00
140	138,00	142,00
150	148,00	152,00
160	158,00	162,00

Alle technischen Daten beziehen sich auf das Maß mm



**DIN 571**  
**Sechskant-Holzschrauben**

Außensechskant

Edelstahl A4 | Cr(VI) - frei | Holzgewinde

Durchmesser (d)	Länge (l)																	
	20	25	30	35	40	45	50	60	70	80	90	100	110	120	130	140	150	160
4	●	●	●	●	●													
5		●	●	●	●	●	●											
6		●	●	●	●	●	●	●										
7					●	●	●	●										
8		●	●	●	●		●	●	●	●	●							
10							●	●	●	●	●	●						
12							●	●	●	●	●	●	●	●				
16								●	●	●	●	●	●	●	●	●	●	●

• Kombinationen im eShop erhältlich | Weitere Größen auf Anfrage

Alle technischen Daten beziehen sich auf das Maß mm

