


DIN 7985 ähnlich ISO 7045
Linsenschrauben

Kreuzschlitz Z (Pozi driv)

Edelstahl A2 | Cr(VI) - frei | Metrisches Gewinde

Hinweis: DIN-Norm wurde zurückgezogen | geänderte Kopfhöhe

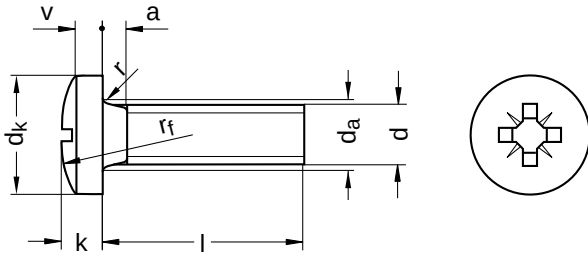

Durchmesser (d)	a		dk		k			rf	r	Steigung (P)	v	Werkzeuggröße
	max.	max.	min.	max.	Nennmaß	min.	max.					
M2	0,8	2,6	3,70	4	1,6	1,48	1,72	4	0,10	0,40	1,1	Z1
M2,5	0,9	3,1	4,70	5	2,0	1,88	2,12	5	0,10	0,45	1,3	Z1
M3	1,0	3,6	5,70	6	2,4	2,28	2,52	6	0,10	0,50	1,6	Z1
M4	1,4	4,7	7,64	8	3,1	2,95	3,25	8	0,20	0,70	2,0	Z2
M5	1,6	5,7	9,64	10	3,8	3,65	3,95	10	0,20	0,80	2,5	Z2
M6	2,0	6,8	11,57	12	4,6	4,45	4,75	12	0,25	1,00	3,0	Z3
M8	2,5	9,2	15,57	16	6,0	5,85	6,15	16	0,40	1,25	3,7	Z4

Nennmaß	Länge (l)	
	min.	max.
3	2,80	3,20
4	3,75	4,25
5	4,75	5,25
6	5,75	6,25
8	7,70	8,30
10	9,70	10,30

Nennmaß	Länge (l)	
	min.	max.
12	11,65	12,35
14	13,65	14,35
16	15,65	16,35
18	17,65	18,35
20	19,60	20,40
25	24,60	25,40

Nennmaß	Länge (l)	
	min.	max.
30	29,60	30,40
35	34,50	35,50
40	39,50	40,50
45	44,50	45,50
50	49,50	50,50
60	59,00	61,00

Durchmesser (d)	Länge (l)																	
	3	4	5	6	8	10	12	14	16	18	20	25	30	35	40	45	50	60
M2	●		●	●	●	●	●	●	●	●	●							
M2,5	●	●	●	●	●	●	●	●	●	●	●							
M3		●	●	●	●	●	●	●	●	●	●	●	●					
M4			●	●	●	●	●	●	●	●	●	●	●	●	●			
M5				●	●	●	●	●	●	●	●	●	●	●	●	●	●	
M6						●	●	●	●	●	●	●	●	●	●	●	●	●
M8							●	●	●	●	●	●	●	●	●	●	●	●

• Kombinationen im eShop erhältlich | Weitere Größen auf Anfrage

Alle technischen Daten beziehen sich auf das Maß mm

