


DIN 7 ähnlich ISO 2338

Zylinderstifte

mit Linsenkupe | Toleranzfeld m6

Edelstahl 1.4305 | Cr(VI) - frei

Hinweis: DIN-Norm wurde zurückgezogen

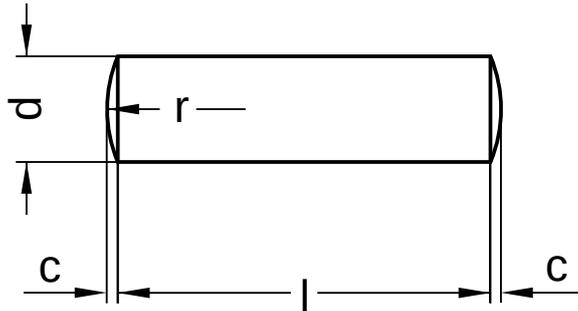

Durchmesser (d)	c max.	r
1	0,15	1,0
1,5	0,23	1,6
2	0,30	2,0
2,5	0,40	2,5
3	0,45	3,0
4	0,60	4,0
5	0,75	5,0
6	0,90	6,0
8	1,20	8,0
10	1,50	10,0
12	1,80	12,0
14	2,00	16,0
16	2,50	16,0
20	3,00	20,0

Länge (l) Nennmaß
3
4
5
6
8
10
12
14
16
18

Länge (l) Nennmaß
20
24
28
30
32
36
40
45
50
55

Länge (l) Nennmaß
60
70
80
90
100

Alle technischen Daten beziehen sich auf das Maß mm



DIN 7 ähnlich ISO 2338

Zylinderstifte

mit Linsenkuppe | Toleranzfeld m6

Edelstahl 1.4305 | Cr(VI) - frei

Durchmesser (d)	Länge (l)																										
	3	4	5	6	8	10	12	14	16	18	20	24	28	30	32	36	40	45	50	55	60	70	80	90	100		
1	●	●		●	●	●	●																				
1,5	●	●		●	●	●	●	●	●																		
2		●	●	●	●	●	●	●	●	●																	
2,5		●	●	●	●	●	●	●	●	●	●	●															
3		●	●	●	●	●	●	●	●	●	●	●	●	●													
4			●	●	●	●	●	●	●	●	●	●	●	●	●	●	●										
5			●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●							
6				●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●					
8					●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●				
10						●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
12							●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
14									●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
16										●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
20											●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●

• Kombinationen im eShop erhältlich | Weitere Größen auf Anfrage

Alle technischen Daten beziehen sich auf das Maß mm

