


**DIN 979** similar to ISO 7038

## Castle nuts

Low form | external hex

Steel 04 | bright | Cr(VI)-free | Metric fine thread

Further information: DIN-standard has been withdrawn | changed spanner widths for M10, M12, M14 and M22

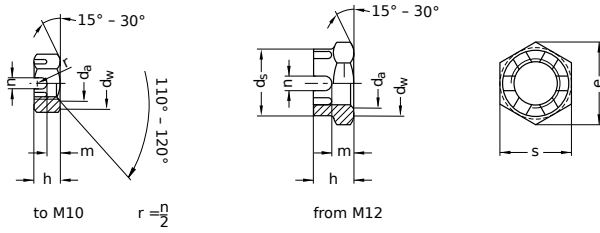

Diameter (d)	d <sub>a</sub>		d <sub>s</sub>		d <sub>w</sub>	h		e	m		n		s		Pitch (P)	Tool size
	min.	max.	min.	max.		min.	max.		min.	max.	min.	max.	min.	max.		
M8 x 1	8	8.75	–	–	11.6	6.14	6.5	14.38	3.20	3.5	2.5	2.75	12.73	13	1.0	SW 13
M10 x 1	10	10.80	–	–	14.6	7.64	8.0	17.77	3.70	4.0	2.8	3.05	15.73	16	1.0	SW 16
M12 x 1.5	12	13.00	15.57	16	16.6	9.64	10.0	20.03	4.70	5.0	3.5	3.80	17.73	18	1.5	SW 18
M14 x 1.5	14	15.10	17.57	18	19.6	10.57	11.0	23.35	5.70	6.0	3.5	3.80	20.67	21	1.5	SW 21
M16 x 1.5	16	17.30	21.48	22	22.5	12.57	13.0	26.75	6.64	7.0	4.5	4.80	23.67	24	1.5	SW 24
M18 x 1.5	18	19.50	24.30	25	24.9	14.30	15.0	29.56	8.64	9.0	4.5	4.80	26.16	27	1.5	SW 27
M20 x 1.5	20	21.60	27.30	28	27.7	15.30	16.0	32.95	9.64	10.0	4.5	4.80	29.16	30	1.5	SW 30
M22 x 1.5	22	23.80	31.00	32	31.4	17.30	18.0	37.29	9.64	10.0	5.5	5.80	33.00	34	1.5	SW 34
M24 x 1.5	24	25.90	33.00	34	33.3	18.16	19.0	39.55	10.57	11.0	5.5	5.80	35.00	36	1.5	SW 36
M27 x 1.5	27	29.20	37.00	38	38.0	21.16	22.0	45.20	13.57	14.0	5.5	5.80	40.00	41	1.5	SW 41
M30 x 1.5	30	32.40	41.00	42	42.8	23.16	24.0	50.85	14.57	15.0	7.0	7.36	45.00	46	1.5	SW 46
M33 x 1.5	33	35.60	45.00	46	46.6	25.16	26.0	55.37	16.57	17.0	7.0	7.36	49.00	50	1.5	SW 50
M36 x 1.5	36	38.90	49.00	50	51.1	28.16	29.0	60.79	19.48	20.0	7.0	7.36	53.80	55	1.5	SW 55

All technical data refer to the measure mm

