


ISO 4032 similar to DIN 934

Hexagon nuts

Steel 10 | zinc-plated | Cr(VI)-free | Metric thread

Further information: ISO-standard has been withdrawn | changed spanner widths for M10, M12, M14 and M22 | changed head height | the fine thread has been transferred to ISO 8673

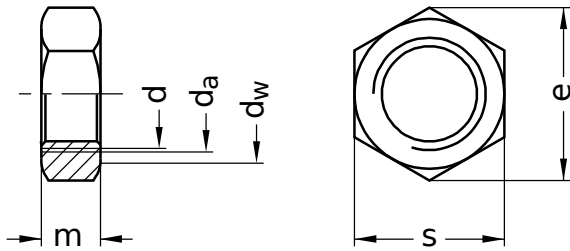

Diameter (d)	d _a		d _w	e	m		s		Pitch (P)	Tool size
	min.	max.	min.	min.	min.	max.	min.	max.		
M6	6	6.75	8.9	11.05	4.90	5.2	9.78	10	1.00	SW 10
M8	8	8.75	11.6	14.38	6.44	6.8	12.73	13	1.25	SW 13
M12	12	13.00	16.6	20.03	10.37	10.8	17.73	18	1.75	SW 19
M14	14	15.10	19.6	23.36	12.10	12.8	20.67	21	2.00	SW 22
M16	16	17.30	22.5	26.75	14.10	14.8	23.67	24	2.00	SW 24
M30	30	32.40	42.8	50.85	24.30	25.6	45.00	46	3.50	SW 46
M42	42	45.40	60.0	71.30	32.40	34.0	63.10	65	4.50	SW 65
M48	48	51.80	69.5	82.60	36.40	38.0	73.10	75	5.00	SW 75

All technical data refer to the measure mm

