

RIVQUICK® Standard rivets

Dome head

Note: aluminium body and stainless steel A2 mandrel

Technical information can be found on the last page.




Diameter (d)	d ₁ nominal size	d ₂ nominal size	Drilling diameter d nominal size	e		Length (l) nominal size	Head thickness	Shear force (N)	Tensile force (N)
				min.	max.				
3	3	6.5	3.1 - 3.2	1.0	3.0	6	0.9	600	950
				3.0	5.0	8			
				5.0	7.0	10			
3.2	3.2	6.5	3.3 - 3.4	1.0	3.0	6	0.9	750	1000
				3.0	5.0	8			
				5.0	7.0	10			
				7.0	9.0	12			
4	4	8	4.1 - 4.2	1.0	2.5	6	1.2	1200	1750
				3.0	4.5	8			
				5.0	6.5	10			
				7.0	8.5	12			
				8.0	10.5	14			
				10.0	12.5	16			
4.8	4.8	9.5	4.9 - 5.0	0.5	2.0	6	1.4	1850	2600
				2.5	4.0	8			
				4.5	6.0	10			
				6.5	8.0	12			
				7.5	10.0	14			
				9.5	12.0	16			
				11.5	14.0	18			
				13.5	16.0	20			
				19.5	22.0	26			
23.5	26.0	30							

All technical data refer to the measure mm



Symbol list

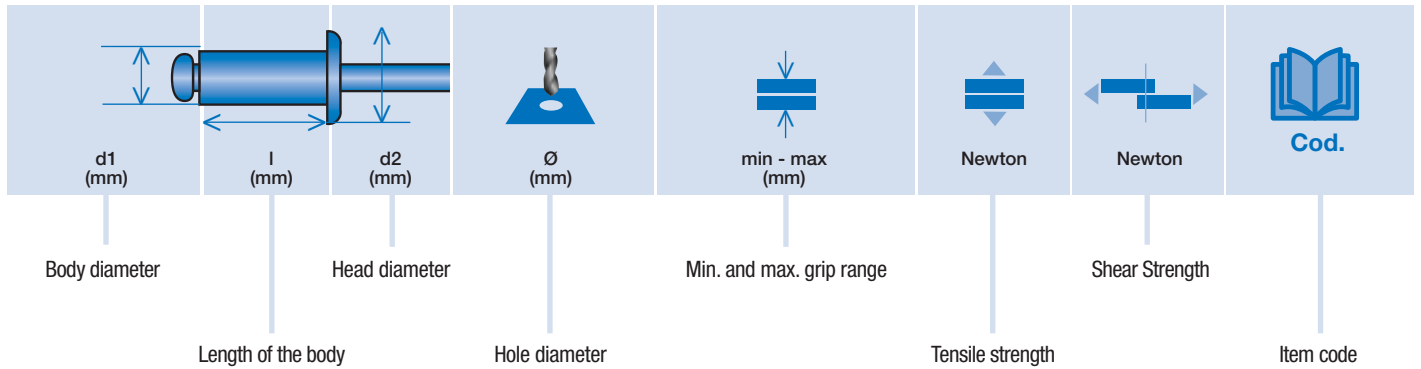

All technical data refer to the measure mm

