


DIN 126 similar to ISO 7091

Washers

Rough version

Steel | bright | Cr(VI)-free

Further information: DIN standard has been withdrawn

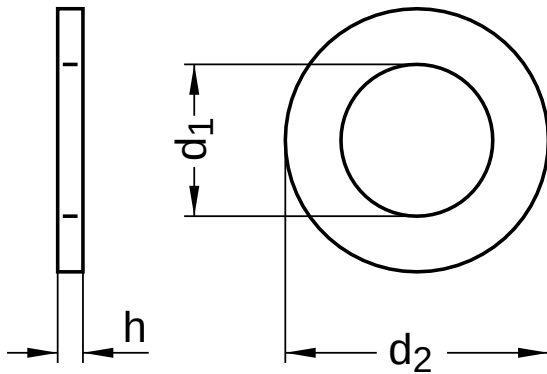

Diameter (d)	d ₁		d ₂		h		
	min.	max.	min.	max.	nominal size	min.	max.
5.5	5.5	5.80	9.1	10	1.0	0.8	1.2
6.6	6.6	6.96	10.9	12	1.6	1.3	1.9
7.6	7.6	7.96	12.9	14	1.6	1.3	1.9
11	11.0	11.43	18.7	20	2.0	1.7	2.3
13.5	13.5	13.93	22.7	24	2.5	2.2	2.8
15.5	15.5	15.93	26.7	28	2.5	2.2	2.8
17.5	17.5	17.93	28.7	30	3.0	2.4	3.6
22	22.0	22.52	35.4	37	3.0	2.4	3.6
24	24.0	24.52	37.4	39	3.0	2.4	3.6
26	26.0	26.52	42.4	44	4.0	3.4	4.6
33	33.0	33.62	54.1	56	4.0	3.4	4.6
39	39.0	40.00	64.1	66	5.0	4.0	6.0
42	42.0	43.00	70.1	72	6.0	5.0	7.0
45	45.0	46.00	76.1	78	7.0	5.8	8.2
48	48.0	49.00	82.8	85	7.0	5.8	8.2
52	52.0	53.20	89.8	92	8.0	6.8	9.2
56	56.0	57.20	95.8	98	8.0	6.8	9.2
62	62.0	63.20	102.8	105	9.0	7.8	10.2
66	66.0	67.20	107.8	110	9.0	7.8	10.2
70	70.0	71.20	112.8	115	9.0	7.8	10.2
78	78.0	79.20	122.5	125	10.0	8.8	11.2

All technical data refer to the measure mm

