


DIN 316

Flügelschrauben

runde Flügelform (deutsche Form)

Stahl Temperguss | verzinkt | Cr(VI) - frei | Metrisches Gewinde

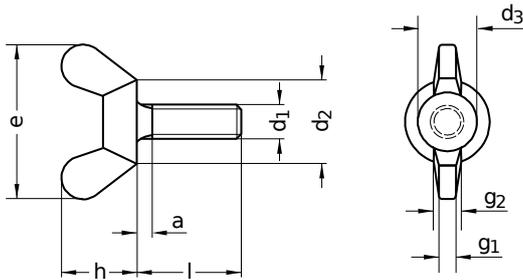

Durchmesser (d)	a max.	d ₁ Nennmaß	d ₂		d ₃		e		g ₁		g ₂		h		m		Steigung (P)
			min.	max.	min.	max.	min.	max.	min.	max.	min.	max.	min.	max.			
M4	2,1	M 4	6	8	5,5	7,0	20	18	1,1	1,9	1,7	2,3	8,5	10,5	3,2	4,6	0,70
M5	2,4	M 5	8	11	7,5	9,0	26	24	1,5	2,3	2,3	2,8	11,0	13,0	4,0	6,5	0,80
M6	3,0	M 6	10	13	9,0	11,0	33	30	1,5	2,3	2,7	3,3	15,0	17,0	5,0	8,0	1,00
M8	4,0	M 8	13	16	10,5	12,5	39	36	2,0	2,8	3,6	4,4	18,0	20,0	6,5	10,0	1,25
M10	4,5	M 10	17	20	14,5	16,5	51	48	3,6	4,4	4,6	5,4	23,0	25,0	8,0	12,0	1,50
M12	5,3	M 12	20	23	17,5	19,5	65	62	4,1	4,9	5,6	6,4	31,0	33,5	10,0	14,0	1,75

Länge (l)	Nennmaß
10	
12	
16	
20	
25	
30	

Länge (l)	Nennmaß
35	
40	
50	
60	

Durchmesser (d)	Länge (l)									
	10	12	16	20	25	30	35	40	50	60
M4	●	●	●							
M5	●	●		●	●					
M6	●	●	●	●	●	●	●	●		
M8	●		●	●	●	●	●	●	●	●
M10			●	●	●	●		●	●	
M12			●		●	●		●		●

• Kombinationen im eShop erhältlich | Weitere Größen auf Anfrage

Alle technischen Daten beziehen sich auf das Maß mm

