


DIN 661
Senkniete

Stahl | blank | Cr(VI) - frei

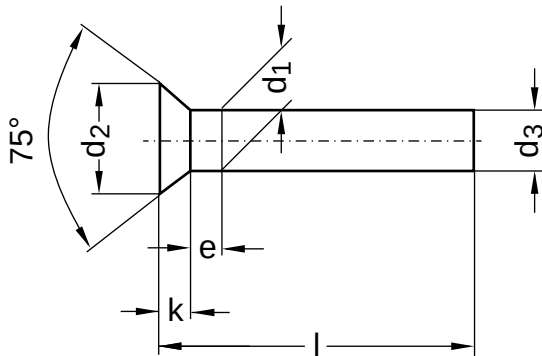

Durchmesser (d)	Nennmaß	d ₁		d ₂ Nennmaß	d ₃ min.	e max.	k Nennmaß
		min.	max.				
2	2	1,90	2,10	3,5	1,87	1,0	1,0
3	3	2,90	3,10	5,2	2,87	1,5	1,4
4	4	3,90	4,10	7	3,81	2,0	2,0
5	5	4,85	5,15	8,8	4,82	2,5	2,5
6	6	5,85	6,15	10,5	5,82	3,0	3,0
8	8	7,85	8,15	14	7,76	4,0	4,0

Nennmaß	Länge (l)	
	max.	
6	6,30	
8	8,36	
10	10,36	
12	12,43	
16	16,43	
20	20,52	

Nennmaß	Länge (l)	
	max.	
25	25,52	
30	30,52	
35	35,62	
40	40,62	

Durchmesser (d)	Länge (l)									
	6	8	10	12	16	20	25	30	35	40
2	●	●			●	●				
3	●		●	●	●	●	●	●		
4	●	●	●	●	●	●	●	●	●	
5	●	●	●	●	●	●	●	●	●	●
6			●	●	●	●		●	●	●
8				●	●	●	●	●	●	●

• Kombinationen im eShop erhältlich | Weitere Größen auf Anfrage

Alle technischen Daten beziehen sich auf das Maß mm

