


DIN 6911

Hexagon socket screw key

With pilot

Steel 10.9 | bright | Cr(VI)-free

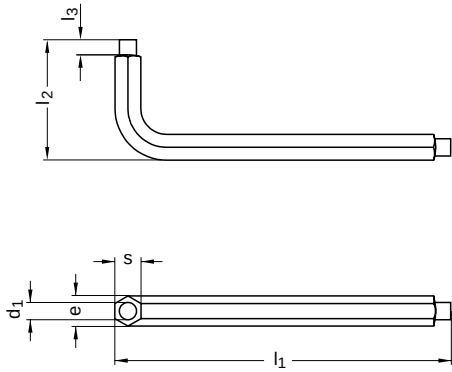

Diameter (d)	d ₁		e		l ₁	l ₂	l ₃	s		Tool size
	min.	max.	max.	min.				min.	max.	
SW 3	1.88	1.94	3.39	3.31	66	23	1.2	2.96	3	SW 3
SW 4	2.38	2.44	4.53	4.44	74	29	1.3	3.95	4	SW 4
SW 5	2.88	2.94	5.67	5.58	85	33	1.6	4.95	5	SW 5
SW 6	3.86	3.93	6.81	6.71	96	38	2.6	5.95	6	SW 6
SW 8	4.86	4.93	9.09	8.97	108	44	2.8	7.94	8	SW 8
SW 10	5.86	5.93	11.37	11.23	122	50	3.2	9.94	10	SW 10
SW 12	6.83	6.92	13.65	13.44	137	57	3.5	11.89	12	SW 12
SW 14	7.83	7.92	15.93	15.70	154	70	3.6	13.89	14	SW 14
SW 17	9.83	9.92	19.35	19.09	177	80	4.5	16.89	17	SW 17
SW 19	11.80	11.90	21.63	21.32	199	89	5.5	18.87	19	SW 19
SW 22	14.80	14.90	25.05	24.71	222	102	6.5	21.87	22	SW 22

All technical data refer to the measure mm

