

**DIN 939**  
**Studs**


Threaded end  $\approx 1,25 d$

Steel 8.8 | bright | Cr(VI)-free | Metric thread



Einschraubende

Mutterende

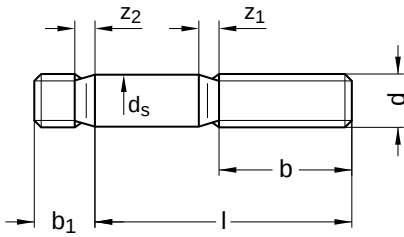

Diameter (d)	l up to 125	b	l up to 200	b <sub>1</sub> nominal size	z <sub>1</sub>	z <sub>2</sub>
M 6	18		24	7.5	2.5	1.25
M 8	22		28	10.0	3.2	1.60
M 10	26		32	12.0	3.8	1.90
M 12	30		36	15.0	4.3	2.20
M 16	38		44	20.0	5	2.50
M 20	46		52	25.0	6.3	3.20

nominal size	Length (l)	
	min.	max.
20	19.58	20.42
25	24.58	25.42
30	29.58	30.42
35	34.50	35.50
40	39.50	40.50
45	44.50	45.50
50	49.50	50.50
55	54.40	55.60

nominal size	Length (l)	
	min.	max.
60	59.40	60.60
65	64.40	65.60
70	69.40	70.60
75	74.40	75.60
80	79.40	80.60
90	89.30	90.70
100	99.30	100.70
110	109.30	110.70

nominal size	Length (l)	
	min.	max.
120	119.30	120.70
130	129.20	130.80
140	139.20	140.80

All technical data refer to the measure mm

