

# RIVQUICK® Standardblindniete

## Flachrundkopf

Hinweis: Hülse aus Aluminium, Dorn aus Edelstahl A2

Technische Informationen finden Sie auf der letzten Seite.




Durchmesser (d)	Artikelnummer	d <sub>1</sub> Nennmaß	d <sub>2</sub> Nennmaß	Bohrloch d Nennmaß	e		Länge (l) Nennmaß	Kopfdicke	Scherkraft (N)	Zugkraft (N)
					min.	max.				
3	22135130060	3	6,5	3,1 - 3,2	1,0	3,0	6	0,9	600	950
	22135130080				3,0	5,0	8			
	22135130100				5,0	7,0	10			
3,2	22135132060	3,2	6,5	3,3 - 3,4	1,0	3,0	6	0,9	750	1000
	22135132080				3,0	5,0	8			
	22135132100				5,0	7,0	10			
	22135132120				7,0	9,0	12			
4	22135140060	4	8	4,1 - 4,2	1,0	2,5	6	1,2	1200	1750
	22135140080				3,0	4,5	8			
	22135140100				5,0	6,5	10			
	22135140120				7,0	8,5	12			
	22135140140				8,0	10,5	14			
	22135140160				10,0	12,5	16			
4,8	22135148060	4,8	9,5	4,9 - 5,0	0,5	2,0	6	1,4	1850	2600
	22135148080				2,5	4,0	8			
	22135148100				4,5	6,0	10			
	22135148120				6,5	8,0	12			
	22135148140				7,5	10,0	14			
	22135148160				9,5	12,0	16			
	22135148180				11,5	14,0	18			
	22135148200				13,5	16,0	20			
	22135148260				19,5	22,0	26			
	22135148300				23,5	26,0	30			

Alle technischen Daten beziehen sich auf das Maß mm



Legende

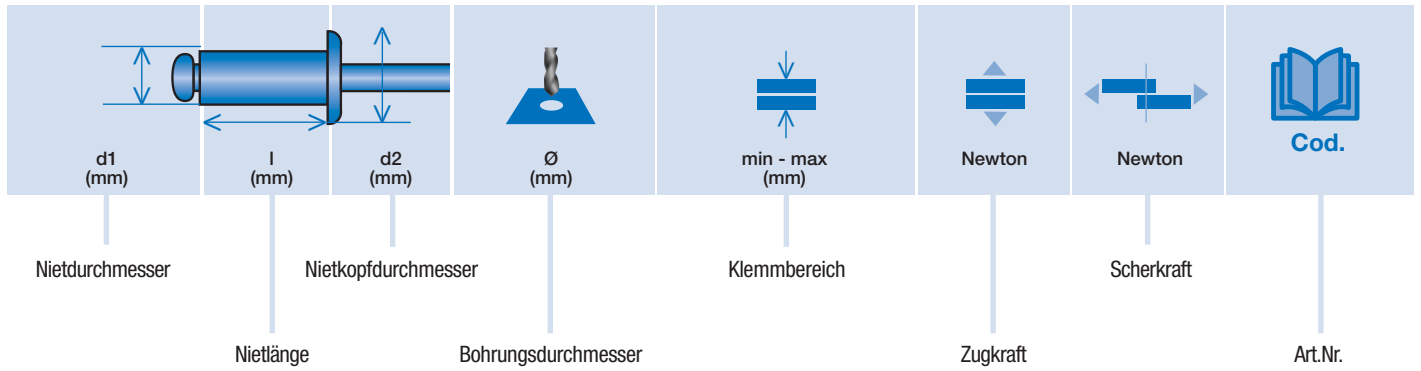

Alle technischen Daten beziehen sich auf das Maß mm

